

**Provided By: Diesel USA Group, Inc.
Authorized Holset Distributor**

HOLSET FRAME SIZES


	HX20	HX25-27	HE200	HX30	HE300	HX35	HX40	HE400	HX50	HX55	HE500	HX60	HX82-83
For Engine Capacity (litres per turbo)	Up to 5	Up to 5	Up to 7	Up to 7	Up to 10	Up to 10	Up to 12	Up to 15	Up to 15	Up to 16	Up to 16	Up to 19	Up to 25
Output Range (kW)	14-60	20-120	75-120	75-120	90-240	90-240	150-280	150-280	220-370	220-420	220-420	240-450	375-840
Airflow (kg/s)	0.2	0.23	0.33	0.33	0.46	0.46	0.53	0.54	0.75	0.75	0.75	0.95	1.5

Dimensions:

Length (mm)	176	254	254	222	250	224	231	319	249	259	278	280	332
Width (mm)	160	226	226	217	240	250	250	319	275	275	278	285	318
Height (mm)	130	148	148	154	220	169	169	230	225	225	267	237	300
Smallest Mass (kg)	2.8	4	4	8	9	9	11	11	16	18	18	18	35
Largest Mass (kg)	2.8	5	5	10	17	11	14	23	19	21	33	22	55

Options:

Holset VGT™					•			•			•		•
Wastegate	•	•	•	•	•	•	•	•	•	•	•	•	•
Ti Impeller					•	•	•	•		•	•	•	•
Machined From Solid Impeller			•	•	•	•	•	•	•	•	•	•	•
Semi-Solid Moulded Impeller								•			•		

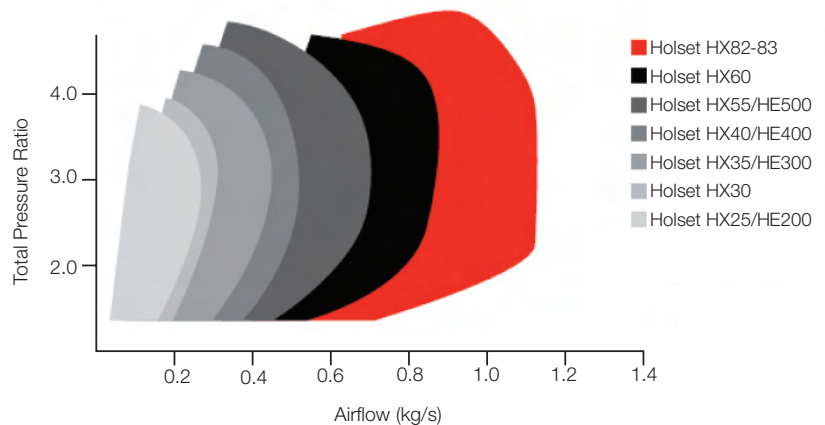

Cummins Turbo Technologies
8550 Palmetto Commerce Parkway
Ladson, Charleston, South Carolina 29420
USA
Tel +1 843 695 2181
Fax +1 843 695 2190
turbo.sales@cummins.com

Cummins Turbo Technologies
Rua Jati, 310
Guarulhos - SP
07180 - 900 Brazil
Tel +55 11 2186 4791/4790
Fax +55 11 2186 4181
holset.brasil@cummins.com

Wuxi Cummins Turbo Technologies
28 Xinxi Road
Wuxi National High and New Technology Development Zone
Wuxi, Jiangsu 214028 China
Tel +86 510 85200800
Fax +86 510 85200899
turbo.mail@cummins.com